



JCB TRACKED EXCAVATOR | JS 330 LC/NLC TIER 3




MAX. OPERATING WEIGHT

33288 kg (73387 lb)

NETT ENGINE POWER

202 kW (271 hp)

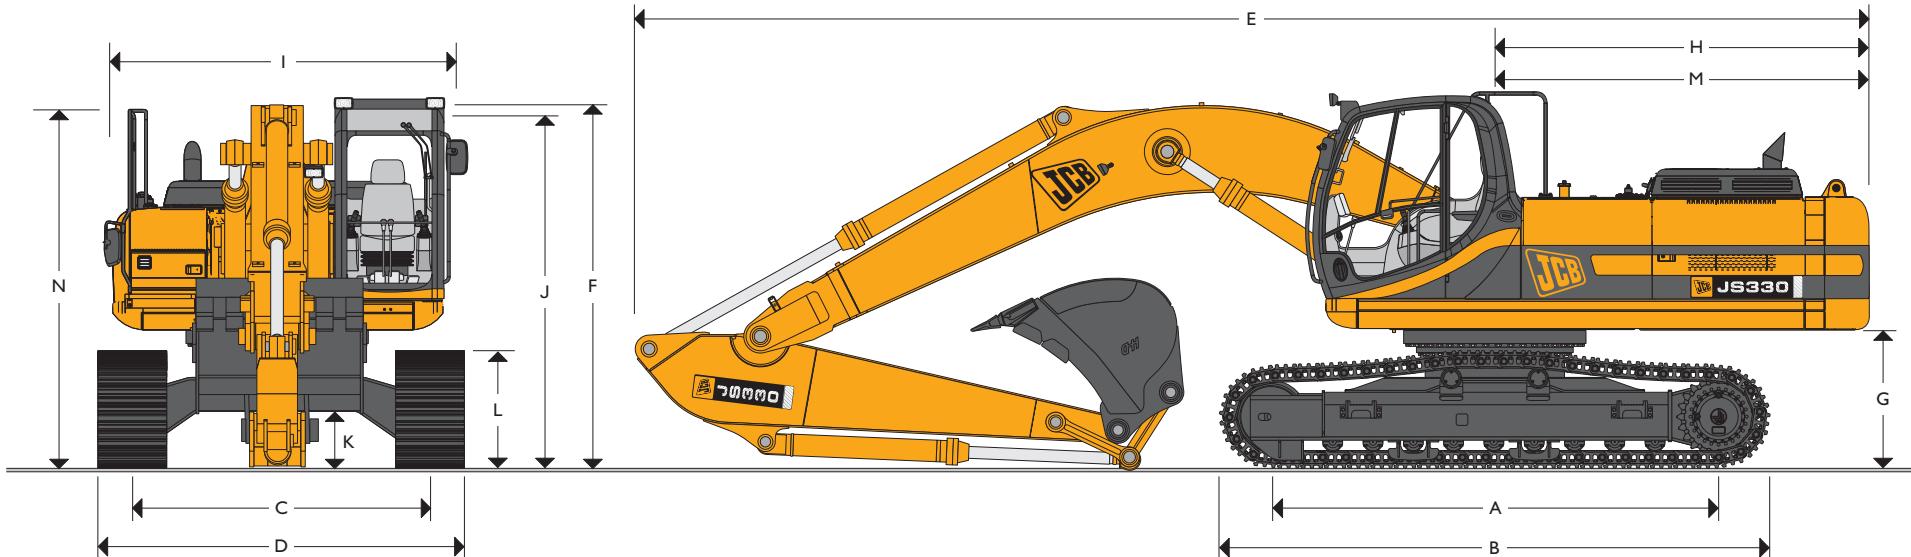

STATIC DIMENSIONS

Dimensions in millimetres (ft-in)		LC	NLC
A	Track length on ground	3910 (12-10)	3910 (12-10)
B	Undercarriage overall length	4810 (15-9)	4810 (15-9)
C	Track gauge	2600 (8-6)	2390 (7-6)
D	Width over tracks (600mm trackshoes)	3200 (10-6)	2990 (9-6)
D	Width over tracks (700mm trackshoes)	3300 (10-10)	3090 (10-10)
D	Width over tracks (800mm trackshoes)	3400 (11-2)	3190 (12-6)
D	Width over tracks (900mm trackshoes)	3500 (11-6)	3290 (10-10)

Standard Boom 6.45m (21ft 2in)				
Dipper lengths	2.21m (7ft 3in)	2.63m (8ft 8in)	3.23m (10ft 8in)	4.03m (13ft 3in)
Dimensions in millimetres (ft-in)				
E	Transport length – L	11070 (36-4)	10980 (36-0)	10880 (35-8)
E	Transport length – NL	11070 (36-4)	10980 (36-0)	10880 (35-8)
F	Transport height – L	3610 (11-10)	3570 (11-9)	3360 (11-3)
F	Transport height – NL	3610 (11-10)	3570 (11-9)	3360 (11-3)

Dimensions in millimetres (ft-in)		LC	NLC
Dipper lengths	2.21m (7ft 3in)	1190 (3-11)	1190 (3-11)
Dimensions in millimetres (ft-in)			
E	Transport length – L	10720 (35-2)	10630 (34-11)
E	Transport length – NL	10720 (35-2)	10630 (34-11)
F	Transport height – L	3610 (11-10)	3570 (11-9)
F	Transport height – NL	3610 (11-10)	3570 (11-9)
G	Counterweight clearance	3280 (10-9)	3280 (10-9)
H	Tail swing radius	2990 (9-10)	2990 (9-10)
I	Overall width of superstructure	3170 (10-5)	3170 (10-5)
J	Height over cab	500 (1-7)	500 (1-7)
K	Ground clearance	1026 (3-4)	1026 (3-4)
L	Track height	3250 (10-8)	3250 (10-8)
M	Tail length	3196 910-6)	3196 (10-6)
N	Height over grab rail		



JCB TRACKED EXCAVATOR | JS 330 LC/NLC TIER 3



ENGINE

Model	Isuzu AH – 6HK1 X Tier 3.
Type	Water cooled, 4-stroke, 6-cylinder in-line, common rail direct injection, turbocharged and intercooled diesel.
Net power (SAE J1349 and 80/1269/EEC)	202kW (271hp) at 2000rpm.
Gross power	210kW (281hp) at 2000rpm.
Piston displacement	7.8 litres (475 cu.in.)
Bore/stroke	115mm x 125mm (4.5in. x 4.9in.)
Air filtration	Dry element with secondary safety element and in-cab warning indicator.
Starting system	24 volt.
Batteries	2 x 12 volt.
Alternator	24V, 50 ampere.

UNDERCARRIAGE

Carriage options	L-Long Carriage and NL-Narrow Long Carriage.
Construction	Fully welded, 'X' frame type with central bellyguarding and sloping sidemembers with dirt relief holes under top rollers.
Recovery point	Front and rear.
Track shoe options	600mm (24in), 700mm (28in), 800mm (32in), 900mm (34in).
Upper & lower rollers	Heat treated, sealed and lubricated.
Track adjustment	Grease cylinder type.
Track idler	Sealed and lubricated, with spring cushioned recoil.
Track type	Sealed and lubricated.
No. of track guides	NL & L
No. of lower rollers	2 per side
No. of upper rollers	9 per side
No. of track shoes	2 per side
	50 per side

SWING SYSTEM

Swing motor	Axial piston type.
Swing brake	Hydraulic braking plus automatic spring applied disc type parking brake.
Final drive	Planetary reduction.
Swing speed	9.5 rpm
Swing gear	Large diameter, internally toothed fully sealed grease bath lubricated.
Swing lock	Multi position switchable brake.

EXCAVATOR END

Monoboom is standard on the JS330 along with a choice of dipper lengths to suit the requirements of reach, dig-depth, loadover height and tearouts. Reserve strength is built into the fully welded structures for hydraulic hammer and other arduous operations. Fabricated bucket tipping links are provided with a choice of lift points.



JCB TRACKED EXCAVATOR | JS 330 LC/NLC TIER 3



HYDRAULIC SYSTEM

A variable flow load sensing system with flow on demand, variable power output and servo operated, multi-function open centre control.

Pumps

Main pumps	2 variable displacement axial piston type.
Maximum flow	2 x 290 L/min (2 x 64 UK GPM).
Servo pump	Gear type.
Maximum flow	30 L/min (6.6 UK GPM).

Control valve

A combined four and five spool control valve with auxiliary service spool as standard. When required twin pump flow is combined to boom, dipper and bucket services for greater speed and efficiency.

Relief valve settings

Boom/Arm/Bucket	319 bar (4627lbf/sq.in)
With power boost	348 bar (5047lbf/sq.in)
Swing circuit	280 bar (4061lbf/sq.in)
Travel circuit	325 bar (4712lbf/sq.in)
Pilot control	45 bar (652lbf/sq.in)

Hydraulic cylinders

Double acting type, with bolt-up end caps and hardened steel bearing bushes. End cushioning is fitted as standard on boom, dipper and bucket rams.

Filtration

The hydraulic components are protected by the highest standard of filtration to ensure long hydraulic fluid and component life.

In tank	150 micron, suction strainer.
Main return line	10 micron, fibreform element.
Plexus bypass line	1.5 micron, paper element.
Pilot line	10 micron, paper element.
Hydraulic hammer return	10 micron, reinforced microform element.

Cooling

Worldwide cooling is provided via a single faced full return line air blast cooler with anti-block wavy cooling fins and separate easy clean fine mesh grill.

TRACK DRIVE

Type	Fully hydrostatic, three speed with autoshift.
Travel motors	Variable swash axial piston type, fully guarded within undercarriage frame.
Final drive	Planetary reduction, bolt-on sprockets.
Service brake	Hydraulic counter balance valve to prevent overspeeding on gradients.
Park brake	Disc type, spring applied, automatic hydraulic release.
Gradeability	70% (35 deg) continuous.
Travel speed	High – 5 km/h (3 mph). Mid – 3.4 km/h (2.1 mph). Low – 2.4 km/h (1.5 mph).
Tractive effort	244kN (24900kgf, 54904lbf).

CAB

Excellent digging, loading and positioning visibility results from the careful design of front, side and roof lights. All screens are tinted to improve in cab conditions.

Fully opening front screen is very smooth to operate and as the lower screen is stored within the top screen frame it makes complete front screen opening easy, fast and convenient.

Fresh air ventilation available from opening door window, opening slot in front screen and fully opening front screen.

Parallelogram wash wiper for upper screen ensuring good wiped area for maximum visibility. Wiper motor is fitted in the left hand side of the roof screen so as not to affect bucket visibility when loading. Optional lower screen wiper available.

Fresh air ventilation and heater with windscreens demister. Infinitely variable blower speed, temperature and recirculation control.

Air conditioning or climate control incorporating chilled cool box available as option. Fully adjustable deluxe suspension seat with arm rest adjustment and backrest recline. Radio cassette player with digital tuner fitted into the roof lining for maximum protection. Conveniently placed radio mute button incorporated into lower console. 12v power point and mobile phone holder built into the right hand console. Courtesy light can be operated from ground level and is illuminated for five minutes or until switched off improving operator access at night. Cab mounted roller blind protects operator from sun's glare through front or top screens.

AMS – ADVANCED MANAGEMENT SYSTEM

Four selectable working modes link the operators control movements with the engine and hydraulic systems to maximise productivity and efficiency.

A (Auto)

Up to 100% engine power and 100% flow. Gives variable power and speed depending on the operator's input, matching the demand for output and efficiency to the job. Power boost is automatically activated in this mode should hard conditions be encountered. Auto idle cuts in after a period of inactivity (between 5 and 30 seconds as set by the operator)

E (Economy)

P (Precision)

L (Lifting)

80% engine power. 95% of hydraulic flow maximises economy while maintaining excellent output.

55% engine power. 90% of hydraulic flow for fine control of grading operations.

55% engine power. 63% of hydraulic flow with permanent power boost for maximum lifting power and control.

The Auto mode allows the AMS processor to select the optimum operational performance to match the demands of the job while the three alternative modes give precise matching of application when specific tasks are undertaken.

The adjustable position monitor mounted on the front right hand pillar of the cab gives the operator a constant read out of mode, tracking range, operating temperature and a host of other information, while retaining excellent visibility of the monitor and the job being carried out.

The required flow for hammer applications can be set and stored in the AMS memory and is automatically activated whenever the hammer pedal is depressed.

A maintenance indicator warns of imminent service needs, and all servicing and basic checks can be carried out using only the in cab display.

CONTROLS

Excavator	All servo lever operated to ISO control pattern, independently adjustable to the seat.
Tracks	Individually servo operated by foot pedal or hand lever.
Auxiliary	Speed selection via joystick button.
Control isolation	Via servo operated foot pedal.
Engine speed	Via gate lock lever at cab entrance or panel switch.
Engine stop	Dial type throttle control plus servo lever mounted one-touch idle control or separate selectable auto-idle with adjustable time delay using AMS.
Horn	Ignition key operated and separate shut-down button.
	Operated via servo lever mounted button.



JCB TRACKED EXCAVATOR | JS 330 LC/NLC TIER 3



STANDARD EXCAVATING BUCKETS

Standard excavating buckets are fully welded, heavy duty steel with hardened and sealed pivot pins.

Boom length: 6.45m (21ft 2in)							
Bucket width mm (in)	900 (35)	1000 (39)	1200 (47)	1350 (53)	1500 (59)	1600 (63)	1800 (71)
Bucket capacity m ³ (yd ³)	0.85 (1.11)	0.98 (1.28)	1.245 (1.63)	1.45 (1.9)	1.49 (1.95)	1.61 (2.1)	1.845 (2.41)
Bucket weight kg (lb)	921 (2030)	974 (2147)	1107 (2441)	1228 (2707)	1252 (2760)	1304 (2875)	1420 (3131)

Dipper length

2.21m (7ft 3in)	○	○	○	○	○	○	○
2.63m (8ft 8in)	○	○	○	○	○	○	●
3.23m (10ft 7in)	○	○	○	○	●	●	●
4.03m (13ft 3in)	○	○	○	●	●	■	■

Boom length: 6.1m (20ft 0in)

Bucket width	1800 (71)	1750 (70)	1750 (70)
Bucket capacity m ³ (yd ³)	1.845 (2.41)	2.2 (2.88)	2.34 (3.06)
Bucket weight kg (lb)	1420 (3131)	1790 (3946)	1850 (4079)
Dipper length			
2.21m (7ft 3in)	○	●	●
2.63m (8ft 8in)	○	■	■

○ Material weight up to 1800kg/m³ (1.35t/yd³)

● Material weight up to 1500kg/m³ (1.1t/yd³)

■ Material weight up to 1200kg/m³ (0.90t/yd³)

These recommendations are given as a guide based on typical operating conditions.

Please contact your distributor for the correct selection of buckets and attachments to suit the application.

SERVICE CAPACITIES

	Litres	UK gal
Fuel tank	518	114
Engine coolant	38.0	8.4
Engine oil	38.0	8.4
Swing reduction gear	14.5	3.19
track reduction gear (each side)	8.5	1.87
Hydraulic system	320.0	70.4
Hydraulic tank	152.0	33.4

STANDARD / OPTIONAL EQUIPMENT

Standard Equipment: Engine fan guard; Cold start pre-heat; Auto engine warm up; Double element air cleaner; Electric refuelling pump; Heavy duty alternator; Electrics isolator; Heavy duty batteries; Cab & engine soundproofing; Cab heater & screen demister; Tinted glass; Interior light; Coat hook; Cigarette lighter; Ashtray; Air conditioning; Operator's storage box; Removable floor mat; Windscreen wash/wipe; Plug-in power socket; Automatic power boost; Auto-idle; One-touch engine speed control; Hydraulic cushion control; Boom/swing priority switch; Plexus hydraulic oil filtration; HSP pressure test points; Auxiliary pipework mounting brackets; Work lights – boom & mainframe mounted; Undercarriage belly guarding; Upper structure under covers; Swing system cover; Twin track guides; External mirrors; Handrail & non slip walk ways; Quick connect engine oil drain pipe; Front screen blind; Quick connect fuel tank drain pipe; Hinged engine under cover.

Optional Equipment: Hose burst check valves & overload warning system; Tipping link mounted lift points; General purpose buckets; Ditch/grading buckets; Quick hitch buckets; Hydraulic hammers; Auxiliary pipework (full and low flow); Cab mounted & rear work lights; Rotating beacon; Rain guard; Biodegradeable oil; Air suspension seat with heated pad and lumbar support adjustment; lower screen wiper; Radio & cassette player; Cab protection guarding (FOPS level II).

WEIGHTS

Equipped with 6.45m (21ft 2in.) boom, 3.23m (10ft 7in) arm, standard bucket, operator and full fuel tank, 6300kg (13230lb) counterweight.

JS330 NLC

Shoe Width	Operating Weight	Ground Bearing Pressure
600mm (24in)	32089kg (70744lb)	0.64kgf/sq.cm (9.1lbf/sq.in)
700mm (28in)	32489kg (71626lb)	0.55kgf/sq.cm (7.9lbf/sq.in)
800mm (31in)	32889kg (72507lb)	0.49kgf/sq.cm (7.0lbf/sq.in)
900mm (35in)	33289kg (73389lb)	0.44kgf/sq.cm (6.3lbf/sq.in)

JS330 LC

Shoe Width	Operating Weight	Ground Bearing Pressure
600mm (24in)	32229kg (71052lb)	0.64kgf/sq.cm (9.1lbf/sq.in)
700mm (28in)	32629kg (71934lb)	0.56kgf/sq.cm (7.9lbf/sq.in)
800mm (31in)	33029kg (72816lb)	0.49kgf/sq.cm (7.0lbf/sq.in)
900mm (35in)	33429kg (73698lb)	0.44kgf/sq.cm (6.3lbf/sq.in)




JCB TRACKED EXCAVATOR | JS 330 LC/NLC TIER 3



WORKING RANGE

Standard Boom – Boom length: 6.45m (21ft 2in)		
Dipper length	2.21m (7ft 3in)	2.63m (8ft 8in)
A Maximum digging reach	10170mm (33ft 4in)	10570mm (34ft 8in)
B Maximum reach on ground	9960mm (32ft 8in)	10370mm (34ft 0in)
C Maximum digging depth	6370mm (20ft 11in)	6800mm (22ft 4in)
D Maximum digging height	9740mm (31ft 11in)	9980mm (32ft 9in)
E Maximum dumping height	6710mm (22ft 0in)	6910mm (22ft 8in)
F Maximum vertical cut depth	5020mm (16ft 6in)	5610mm (18ft 5in)
G Minimum swing radius	4670mm (15ft 3in)	4640mm (15ft 3in)
Bucket rotation	184.5°	184.5°
Dipper tearout	kgf (lbf)	18300 (40350)
Dipper tearout with boost	kgf (lbf)	20284 (44719)
Bucket tearout		17900 (39470)
Bucket tearout with boost	kgf (lbf)	19500 (43000)
Standard Boom – Boom length: 6.45m (21ft 2in)		
Dipper length	3.23m (10ft 7in)	4.03m (13ft 3in)
A Maximum digging reach	11130mm (36ft 6in)	11860mm (38ft 11in)
B Maximum reach on ground	10940mm (35ft 11in)	11680mm (38ft 4in)
C Maximum digging depth	7390mm (24ft 3in)	8190mm (26ft 11in)
D Maximum digging height	10280mm (33ft 8in)	10550mm (34ft 7in)
E Maximum dumping height	7190mm (23ft 7in)	7460mm (24ft 6in)
F Maximum vertical cut depth	6340mm (20ft 10in)	7120mm (23ft 4in)
G Minimum swing radius	4510mm (14ft 10in)	4520mm (14ft 10in)
Bucket rotation	184.5°	184.5°
Dipper tearout with boost	kgf (lbf)	14805 (32639)
Bucket tearout with boost	kgf (lbf)	19500 (43000)
ME Boom – Boom length: 6.10m (20ft 0in)		
Dipper length	2.21m (7ft 3in)	2.63m (8ft 8in)
A Maximum digging reach	9782mm (32ft 1in)	10190mm (33ft 5in)
B Maximum reach on ground	9566mm (31ft 5in)	9984mm (32ft 9in)
C Maximum digging depth	5960mm (19ft 7in)	6387mm (20ft 11in)
D Maximum digging height	9450mm (31ft 0in)	9722mm (31ft 11in)
E Maximum dumping height	6662mm (21ft 10in)	6898mm (22ft 8in)
F Maximum vertical cut depth	3097mm (10ft 2in)	3690mm (12ft 1in)
G Minimum swing radius	4350mm (14ft 3in)	4347mm (14ft 3in)
Bucket rotation	184.5°	184.5°
Dipper tearout with boost	kgf (lbf)	20284 (44719)
Bucket tearout with boost	kgf (lbf)	19500 (43000)

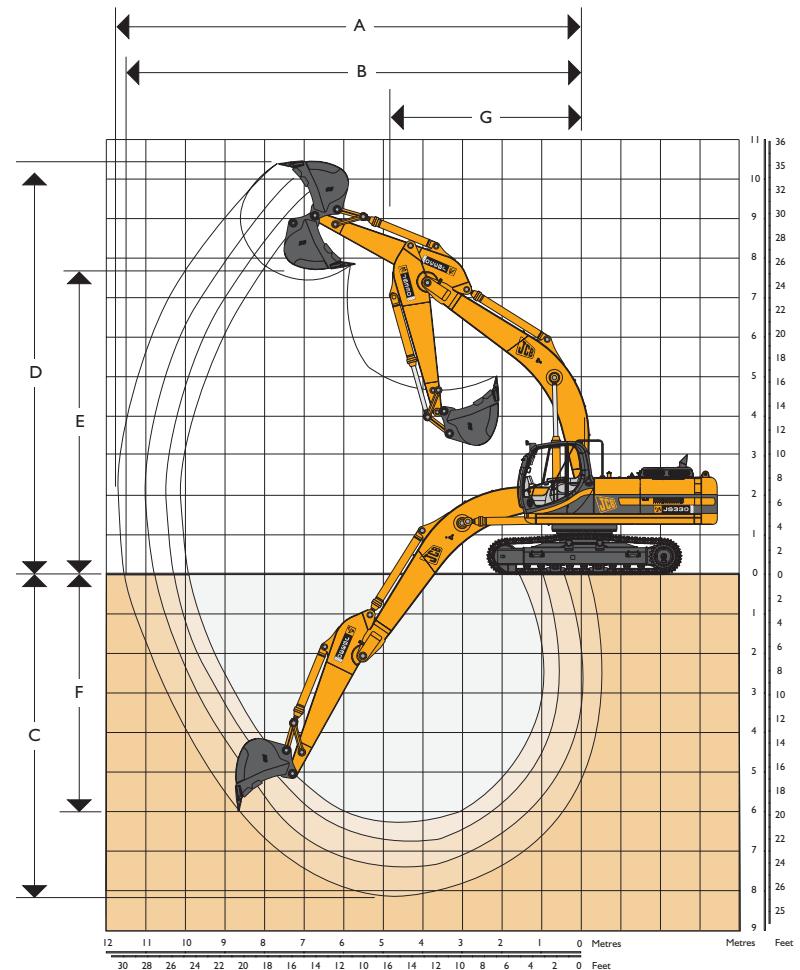



JCB TRACKED EXCAVATOR | JS 330 LC/NLC TIER 3



LIFT CAPACITIES – Dipper length: 2.21m, Boom: 6.45m, Trackshoes: 600mm triple grouser.

JS330 LC

Load Point	Reach from Swing Centre														
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach		
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm	
7.5m (24.7ft)							8640*	8640*					8580*	8100	6491
6m (19.8ft)							8960*	8960*	8240*	6310			8240*	6270	7523
4.5m (14.9ft)					I2990*	I2990*	9900*	8640	8470*	6170			7970	5390	8151
3m (9.10ft)							II000*	8150	8880	5940			7370	4950	8467
1.5m (4.11ft)							I1760*	7770	8650	5730			7200	4810	8506
0m					I5700*	II470	II840	7580	8520	5610			7420	4930	8273
- 1.5m (- 4.11ft)					I4560*	II530	II340*	7550	8520	5610			8160	5390	7741
- 3m (- 9.10ft)			I4810*	I4810*	I2550*	II730	9820	7690					8190*	6480	6842
- 4.5m (- 14.9ft)					8820*	8820*							7170*	7170*	5388
- 6m (- 19.8ft)															

LIFT CAPACITIES – Dipper length: 2.63m, Boom: 6.45m, Trackshoes: 600mm triple grouser.

JS330 LC

Load Point	Reach from Swing Centre														
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach		
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm	
7.5m (24.7ft)													7960*	7230	7008
6m (19.8ft)							8530*	8530*	7810*	6430			7720*	5770	7972
4.5m (14.9ft)					I2240*	I2240*	9520*	8800	8180*	6250			7420	5030	8567
3m (9.10ft)					I4820*	I2400	I0690*	8290	8730*	6010			6910	4650	8867
1.5m (4.11ft)					I4130*	II680	II600*	7870	8710	5780			6760	4520	8905
0m					I6070*	II460	II890	7620	8540	5630			6940	4620	8682
- 1.5m (- 4.11ft)			I1800*	I1800*	I5140*	II480	I1580*	7550	8490	5590			7540	5000	8178
- 3m (- 9.10ft)			I6800*	I6800*	I3380*	II650	I0390*	7640					7950*	5860	7334
- 4.5m (- 14.9ft)			I2540*	I2540*	I0220*	I0220*	7380*	7380*					7370*	7370*	6004
- 6m (- 19.8ft)															

Lift capacity front and rear.

Lift capacity full circle.

- Notes:**
- The above loads are in compliance with SAE and ISO Hydraulic Excavator Lift Capacity Standards.
 - They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 - Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.



JCB TRACKED EXCAVATOR | JS 330 LC/NLC TIER 3



LIFT CAPACITIES – Dipper length: 3.23m, Boom: 6.45m, Trackshoes: 600mm triple grouser.

JS330 LC

Load Point	Reach from Swing Centre																			
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach							
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm						
7.5m (24.7ft)									6740*		6580		5540*		5540*	7713				
6m (19.8ft)									7210*		6530		5350*		5140	8597				
4.5m (14.9ft)							8830*		8830*		7680*		6320		5350*	4540	9150			
3m (9.10ft)					I3720*		I2750		I0100*		8390		8320*		6040	6770	4560	5530*	4220	9432
1.5m (4.11ft)					I5630*		II850		III190*		7910		8710		5780	6630	4430	5890*	4100	9467
0m					I6160*		II450		II780*		7600		8500		5590	6530	4340	6270	4170	9258
- 1.5m (- 4.11ft)			II1700*		I5650*		II350		II720		7470		8400		5500			6730	4460	8788
- 3m (- 9.10ft)			I8510*		I8510*		I4270*		II450		I0900*		7490		8380*	5530		7510*	5090	8009
- 4.5m (- 14.9ft)			I5240*		I5240*		II720*		II720*		8880*		7690				7270*		6500	6815
- 6m (- 19.8ft)																				

LIFT CAPACITIES – Dipper length: 4.03m, Boom: 6.45m, Trackshoes: 600mm triple grouser.

JS330 LC

Load Point	Reach from Swing Centre																				
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach								
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm							
9m (29.6ft)													4890*		4890*	7396					
7.5m (24.7ft)													4550*		4550*	8586					
6m (19.8ft)									6520*		6520*		5990*		4930	4430*	4430*	9387			
4.5m (14.9ft)									7080*		6520		6550*		4830	4450*	4080	9895			
3m (9.10ft)					I2310*		I2310*		9350*		8710		7820*		6220	6900	4680	4590*	3820	I0156	
1.5m (4.11ft)					I4730*		I2320		I0650*		8160		8550*		5930	6730	4510	4870*	3710	I0189	
0m			7390*		7390*		I5970*		II670		II540*		7760		8610	5680	6580	4380	5330*	3750	9995
- 1.5m (- 4.11ft)	7330*	7330*	II080*	II080*	16080*	II400	II1800	7530	8440	5530	6490	4300	5960	3960	9562						
- 3m (- 9.10ft)	II460*	II460*	I5900*	I5900*	I5250*	II390	II440*	7460	8390	5480			6660	4410	8853						
- 4.5m (- 14.9ft)	I6330*	I6330*	I8410*	I8410*	I3390*	II560	I0150*	7560	7600*	5590			7070*	5330	7792						
- 6m (- 19.8ft)			I3160*		I3160*		9900*		9900*		7070*		7070*				6650*	6650*	6196		

Lift capacity front and rear.

Lift capacity full circle.

- Notes:**
- The above loads are in compliance with SAE and ISO Hydraulic Excavator Lift Capacity Standards.
 - They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 - Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.



JCB TRACKED EXCAVATOR | JS 330 LC/NLC TIER 3



LIFT CAPACITIES – Dipper length: 2.21m, Boom: 6.45m, Trackshoes: 600mm triple grouser.

JS330 NLC

Load Point	Reach from Swing Centre																	
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach					
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm				
7.5m (24.7ft)							8640*		8520				8580*		7440	6491		
6m (19.8ft)							8960*		8320		8240		8240		5750	7523		
4.5m (14.9ft)					12990*		11990		9900*		7900		8470*		5650	7940	4930	8151
3m (9.10ft)									11000*		7420		8840		5420	7340	4520	8467
1.5m (4.11ft)									11760*		7050		8620		5220	7170	4380	8506
0m					15700*		10290		11790		6860		8480		5100	7390	4490	8273
- 1.5m (- 4.11ft)					14560*		10350		11340*		6840		8480		5100	8120	4910	7741
- 3m (- 9.10ft)			14810*		12550*		10550		9820*		6970					8190*	5890	6842
- 4.5m (- 14.9ft)					8820*		8820*									7170*	7170*	5388
- 6m (- 19.8ft)																		

LIFT CAPACITIES – Dipper length: 2.63m, Boom: 6.45m, Trackshoes: 600mm triple grouser.

JS330 NLC

Load Point	Reach from Swing Centre																		
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach						
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm					
7.5m (24.7ft)													7960*		6650	7008			
6m (19.8ft)							8530*		8480		7810*		5900		7720*	5300	7972		
4.5m (14.9ft)					12240*		12240*		9520*		8050		8180*		5730	7390	4600	8567	
3m (9.10ft)					14820*		11190		10690*		7560		8730*		5500	6880	4250	8867	
1.5m (4.11ft)					14130*		10490		11600*		7150		8680		5270	6730	4120	8905	
0m					16070*		10280		11840		6910		8510		5120	6910	4200	8682	
- 1.5m (- 4.11ft)			11800*		11800*		15140*		10300		11580*		6840		8460	5080	7500	4550	8178
- 3m (- 9.10ft)			16800*		16800*		13380*		10470		10390*		6920			7950*	5340	7334	
- 4.5m (- 14.9ft)			12540*		12540*		10220*		10220*		7380*		7240			7370*	7240	6004	
- 6m (- 19.8ft)																			

Lift capacity front and rear.

Lift capacity full circle.

- Notes:**
- The above loads are in compliance with SAE and ISO Hydraulic Excavator Lift Capacity Standards.
 - They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 - Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.



JCB TRACKED EXCAVATOR | JS 330 LC/NLC TIER 3



LIFT CAPACITIES – Dipper length: 3.23m, Boom: 6.45m, Trackshoes: 600mm triple grouser.

JS330 NLC

Load Point	Reach from Swing Centre															
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach			
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm		
7.5m (24.7ft)									6740*		6060		5540*		5540*	7713
6m (19.8ft)									7210*		6000		5350*		4720	8597
4.5m (14.9ft)							8830*		8180		7680*		5790		4150	9150
3m (9.10ft)					I3720*		II1530		I0100*		7650		8320*		3850	9432
1.5m (4.11ft)					I5630*		I0650		II1190*		7190		8680		3730	9467
0m					I6160*		I0270		II1780*		6880		8460		3790	9258
– 1.5m (– 4.11ft)			II1700*		I5650*		I0180		II1670		6750		8360		4050	8788
– 3m (– 9.10ft)			I8510*		I8510*		I4270*		I0270		I0900*		6770		4630	8009
– 4.5m (– 14.9ft)			I5240*		I5240*		I1720*		I0540		8880*		6970		5910	6815
– 6m (– 19.8ft)																

LIFT CAPACITIES – Dipper length: 4.03m, Boom: 6.45m, Trackshoes: 600mm triple grouser.

JS330 NLC

Load Point	Reach from Swing Centre															
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach			
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm		
9m (29.6ft)													4890*		7396	
7.5m (24.7ft)													4550*		8586	
6m (19.8ft)							6520*		6220		5990*		4520		4170	9387
4.5m (14.9ft)							7080*		5990		6550*		4430		3730	9895
3m (9.10ft)					I2310*		I2180		9350*		7960		7820*		3480	I0156
1.5m (4.11ft)					I4730*		II1110		I0650*		7430		8550*		3380	I0189
0m			7390*		7390*		I5970*		I0480		II1540*		7030		3410	9995
– 1.5m (– 4.11ft)	7330*		7330*		II1080*		II1080*		I6080*		I0220		II1750		3590	9562
– 3m (– 9.10ft)	II1460*		II1460*		I5900*		I5900*		I5250*		I0210		II1440*		4000	8853
– 4.5m (– 14.9ft)	I6330*		I6330*		I8410*		I8410*		I3390*		I0380		I0150*		4850	7792
– 6m (– 19.8ft)			I3160*		I3160*		9900*		9900*		7070*		7070*		6650*	6196

Lift capacity front and rear.

Lift capacity full circle.

- Notes:**
- The above loads are in compliance with SAE and ISO Hydraulic Excavator Lift Capacity Standards.
 - They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 - Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.



JCB TRACKED EXCAVATOR | JS 330 LC/NLC TIER 3



LIFT CAPACITIES – Dipper length: 2.21m, Boom: 6.1m, Trackshoes: 600mm triple grouser.

JS330 LC ME

Load Point	Reach from Swing Centre																	
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach					
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm				
7.5m (24.7ft)							9290*		9230				9300*		9030	6073		
6m (19.8ft)							9310*		9140				8830*		6830	7166		
4.5m (14.9ft)					12920*		10140*		8780		8830*		6230		8580	5820	7824	
3m (9.10ft)							11190*		8340		8990		6050		7900	5330	8152	
1.5m (4.11ft)							11960*		7980		8790		5860		7720	5180	8193	
0m					16160*		11740		12050		7780		8670		5760	7990	5340	7950
– 1.5m (– 4.11ft)			15470*		15470*		14880*		11780		11430*		7750			8760*	5890	7396
– 3m (– 9.10ft)			15210*		15210*				12500		11990		9470*		7910	8400	7220	6447
– 4.5m (– 14.9ft)																		
– 6m (– 19.8ft)																		

LIFT CAPACITIES – Dipper length: 2.63m, Boom: 6.1m, Trackshoes: 600mm triple grouser.

JS330 LC ME

Load Point	Reach from Swing Centre																		
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach						
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm					
7.5m (24.7ft)							8580*		8580*				7710*		7710*	6615			
6m (19.8ft)							8830*		8830*		8270*		6430		7310*	6240	7630		
4.5m (14.9ft)					12190*		12190*		9730*		8930		8500*		6320	7270*	5400	8250	
3m (9.10ft)					14740*		12820		10880*		8470		8990*		6120	7370	4990	8562	
1.5m (4.11ft)					16310*		12060		11800*		8070		8840		5910	7210	4850	8601	
0m					16420*		11770		12110		7820		8690		5770	7430	4980	8370	
– 1.5m (– 4.11ft)			14940*		14940*		15460*		11750		11720*		7750		8660	5740	8140	5430	7846
– 3m (– 9.10ft)			17220*		17220*		13430*		11920		10230*		7850			8180*	6470	6960	
– 4.5m (– 14.9ft)					9520*		9520*									7220*	7220*	5538	
– 6m (– 19.8ft)																			

Lift capacity front and rear.

Lift capacity full circle.

- Notes:**
- The above loads are in compliance with SAE and ISO Hydraulic Excavator Lift Capacity Standards.
 - They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 - Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.



JCB TRACKED EXCAVATOR | JS 330 LC/NLC TIER 3



LIFT CAPACITIES – Dipper length: 2.21m, Boom: 6.1m, Trackshoes: 600mm triple grouser.

JS330 NLC ME

Load Point	Reach from Swing Centre																	
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach					
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm				
7.5m (24.7ft)							9290*		8480				9300*		8300	6073		
6m (19.8ft)							9310*		8400				8830*		6270	7166		
4.5m (14.9ft)					12920*		12330		10140*		8830*		5720		8540	5330	7824	
3m (9.10ft)							11190*		7610		8950		5530		7870	4880	8152	
1.5m (4.11ft)							11960*		7250		8750		5350		7690	4730	8193	
0m					16160*		10550		12000		7060		8630		5250	7690	4870	7950
– 1.5m (– 4.11ft)			15470*		15470*		14880*		10600		11430*		7030			8760*	5370	7396
– 3m (– 9.10ft)			15210*		15210*		12500*		10800		9470		7190			8400*	6570	6447
– 4.5m (– 14.9ft)																		
– 6m (– 19.8ft)																		

LIFT CAPACITIES – Dipper length: 2.63m, Boom: 6.1m, Trackshoes: 600mm triple grouser.

JS330 NLC ME

Load Point	Reach from Swing Centre																		
	1.5m (4ft 11in)		3m (9ft 10in)		4.5m (14ft 9in)		6m (19ft 8in)		7.5m (24ft 7in)		9m (29ft 6in)		Max. Reach						
Ht.	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	mm					
7.5m (24.7ft)							8580*		8580*				7710*		7310	6615			
6m (19.8ft)							8830*		8540		8270*		5910		7310*	5730	7630		
4.5m (14.9ft)					12190*		12190*		9730*		8190		8500*		5800	7270*	4950	8250	
3m (9.10ft)					14740*		11600		10880*		7740		8990*		5600	7340	4560	8562	
1.5m (4.11ft)					16310*		10860		11800*		7340		8810		5400	7180	4430	8601	
0m					16420*		10580		12060		7100		8650		5260	7400	4540	8370	
– 1.5m (– 4.11ft)			14940*		14940*		15460*		10570		11720*		7030		8620	5230	8110	4950	7846
– 3m (– 9.10ft)			17220*		17220*		13430*		10730		10230*		7130			8180*	5890	6960	
– 4.5m (– 14.9ft)					9520*		9520*									7220*	7220*	5538	
– 6m (– 19.8ft)																			

Lift capacity front and rear.

Lift capacity full circle.

- Notes:**
- The above loads are in compliance with SAE and ISO Hydraulic Excavator Lift Capacity Standards.
 - They do not exceed 87% of hydraulic lifting capacity or 75% of tipping load.
 - Rated loads marked with an asterisk (*) are limited by hydraulic capacity rather than tipping load.



A GLOBAL COMMITMENT TO QUALITY

JCB's total commitment to its products and customers has helped it grow from a one-man business into Britain's largest privately owned manufacturer of backhoe loaders, crawler excavators, wheeled excavators, telescopic handlers, wheeled loaders, dump trucks, rough terrain fork lifts, industrial fork lifts, mini/midi excavators, skid steer loaders and tractors.

By making constant and massive investments in the latest production technology, the JCB factories have become some of the most advanced in Europe.

By leading the field in innovative research and design, extensive testing and stringent quality control, JCB machines have become renowned all over the world for performance, value and reliability.

And with a global sales and service network of over 400 distributors and agents, the company exports over 70% of its production to all five continents.

Through setting the standards by which others are judged, JCB has become one of Britain's most impressive success stories.

